



NOTES:

- USE OF "HIGH PROFILE" BASKET WILL REQUIRE REMOVAL OF BASKET TOP RING(S) AND LOOPS LESS THAN 4-6" BELOW SHOULDER OF ROOT BALL PRIOR TO PLANTING. BURLAP CAN REMAIN.
- AFTER REMOVAL OF BASKET TOP HORIZONTAL RING(S) AND LOOPS, TWINE CAN BE RETIED OVER TOP OF ROOT BALL TO STABILIZE TRUNK THROUGH FIRST YEAR. SEE DRUM LACING ILLUSTRATION FOR RETYING INFORMATION.
- REMOVE ALL BURLAP AND TWINE REMAINING OVER TOP OF ROOT BALL WITHIN ONE YEAR OF PLANTING.
- IF ROOT BALL HAS BEEN REBURLAPPED, REMOVE BURLAP ON THE OUTSIDE OF BASKET AFTER ROOT BALL IS PLACED IN THE PLANTING PIT.
- USE OF SYNTHETIC BURLAP AND TWINE IS PROHIBITED.
- DO NOT LIFT "PACKAGE" BY WIRE BASKET AS IT CAN CAUSE WIRE TO EXTEND ABOVE SHOULDER OF ROOT BALL.
- IF THE SIDES OF THE PLANTING PIT ARE GLAZED OR DRIED, USE A HAND TOOL TO BREAK UP THE SURFACE BEFORE PLANTING.

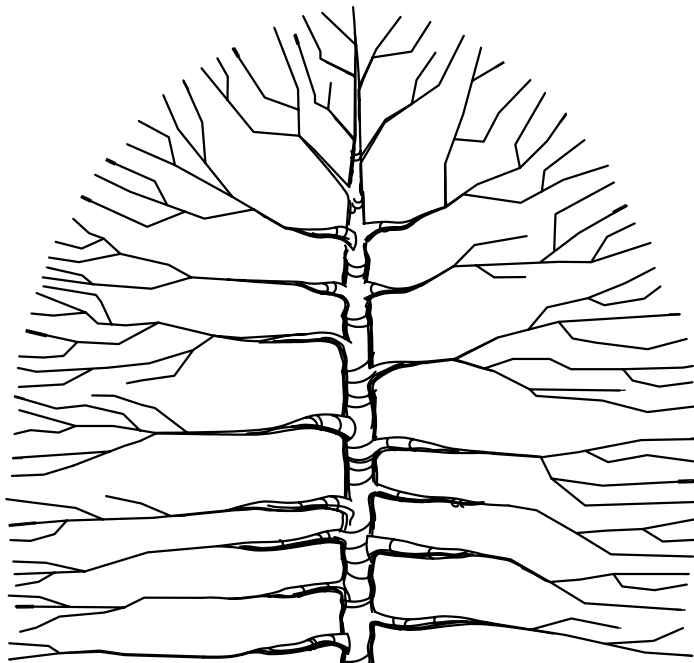

PLANTING PIT DIAMETER AT LEAST 2 TIMES ROOT BALL DIAMETER IN ALL DIRECTIONS. SIDES SHOULD SLOPE FROM SURFACE TO BOTTOM OF ROOT BALL.

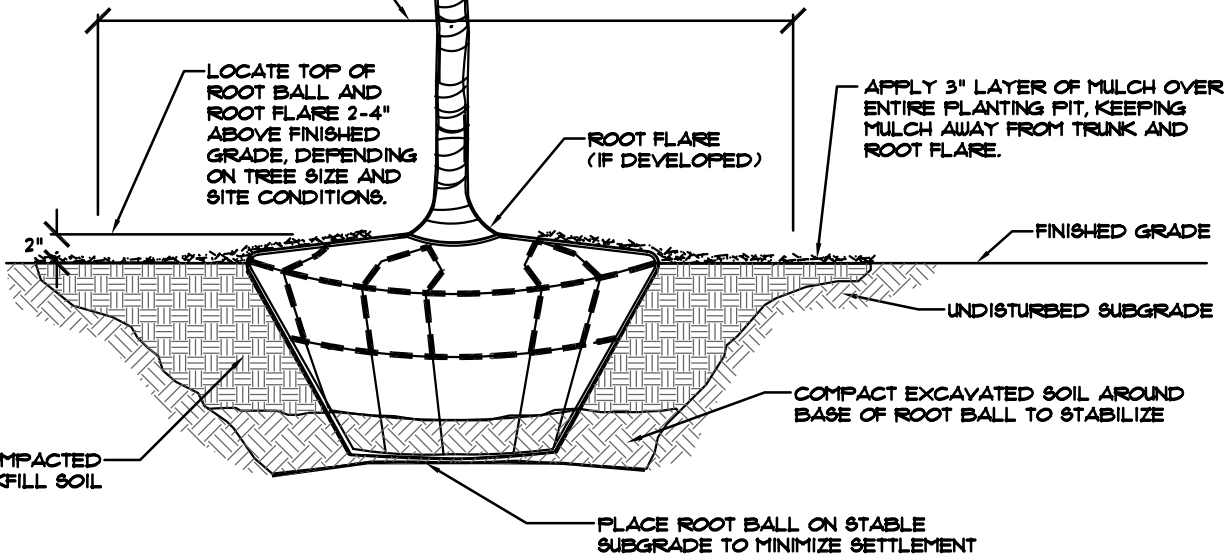

SHADE TREE PLANTING WITH HIGH PROFILE PACKAGE